## Mod. To and Fro








U=3,2 W/m<sup>2</sup> \* K tested by:





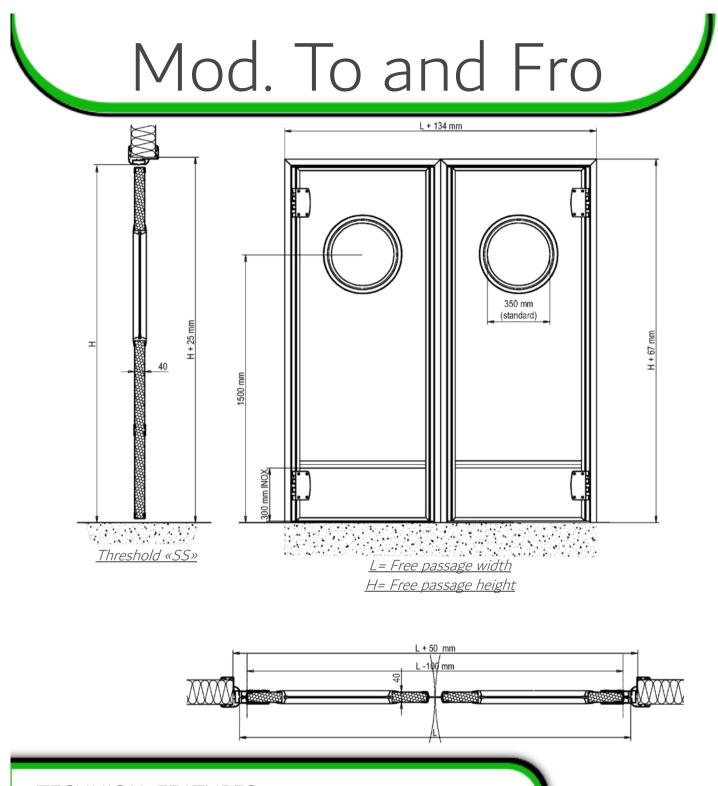

## TECHNICAL FEATURES

- 40mm thick aluminum door leaf
- Internal and external coating in white plasticoated metalsheet Similar Ral 9003
- Anti-shearing EPDM gaskets are applied on the leaf (vertical edges)
- Anodized aluminum telescopic frame for different panel thickness (from 60 to 90 mm / from 91 mm to 120 mm)
- Door leaf injected with polyurethane foam "PUR" CFC free